

## Technical Data Sheet

Rod actuator 24V DC for: top hinged windows, domes, sunshades, louvre windows




### Technical Features


Operating voltage	24V DC $\pm$ 6%
Frequency	=
Stroke adjustable from 0 up to	200 / 300 / 500 mm
Thrust force and Tensile force	450 N (1000N 300mm)
Current absorption	0,75 A
Speed	10 mm/s (1000N 2,5 mm/s)
Operating temperature	-10°/+40°
Operating time	4 min.
Limit switch closing-opening	DEC
Protection degree	IP 55
Colour	Anodised Silver

### Dimensions

Stroke: 200 - 300 mm

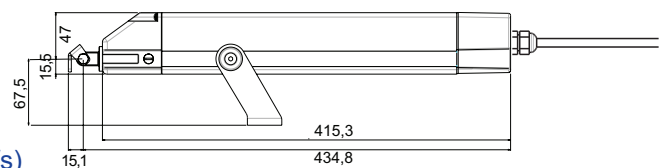

Stroke: 500 mm

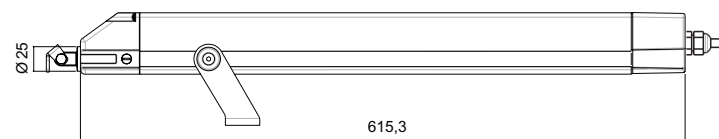

### Limits of use for windows applications

The height of the frame must be at least	300 mm
The width of the frame must not exceed for each actuator	1500 mm
The applied load must not exceed	450 N
Check that the product is suitable for the environment planned	

### Fixing accessories



Front bracket for window frames



Motor support bracket